


Protective Covers and Mounting Brackets


Dust Covers

- IPM-DCSM-1** Standard Model 120 and Mega Model 240
- IPM-DCG-1** Giga Model 480

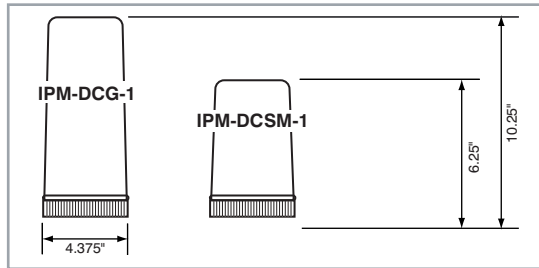

Mounting Brackets

- MLLB-1** Bracket for 1 lubricator
- MLLBK-1** Bracket for 2 or 3 lubricators

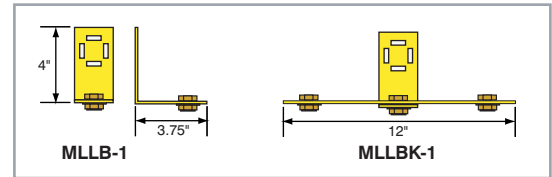

Power Supply Options (used with the MEMOLUB® EPS lubricators)



#OPEPS110AC5V2A EPS Plug in Power

Run the MEMOLUB® EPS lubricator off any 110VAC outlet with the plug in power transformer.




#OPEPS110AC5V2A EPS Rack Mount Power

Connect a 110VAC power supply from your machine or PLC to the rack mount power transformer to run the MEMOLUB® EPS lubricator.

Adapters

- | | |
|---|--|
| A-1 1/4" NPT(F) x 1/4-28 Straight (M), Brass | A-9 1/8" NPT(F) x 1/8 BSPT(M), Brass |
| A-2 1/4" NPT(F) x 1/8" NPT (M), Brass | A-10 1/8" NPT(F) x 1/4-28 Straight (M) x 90°, Steel |
| A-3 1/4" NPT(F) x 1/4" NPT(M) x 90°, Brass | A-11 1/8 BSPT(F) x (8M x 1.0)(M), Brass |
| A-4 1/4" NPT(F) x 1/4" NPT(M) x 45°, Brass | A-12 1/8" NPT(F) x (8M x 1.25)(M), Brass |
| A-5 1/8" NPT(F) x 1/8" NPT(M) x 45°, Brass | A-13 1/8 BSPT(F) x 1/8 NPT(M), Brass |
| A-6 1/8" NPT(F) x 1/4-28 Straight (M), Steel | A-15 1/8" NPT(F) x 1/8 BSPT(M), Steel |
| A-7 1/2" NPT(F) x 1/4" NPT(M), Steel | A-16 1/8" NPT(F) x (6M x 1.0)(M)PP, Steel |
| A-8 1/4" NPT(F) x 1/4" NPT(M), Brass | A-17 1/8" NPT(F) x (6M x .75)(M)PP, Steel |



Other Parts

- B4N-1.375H** 1/4" NPT(M) x 1/4" NPT(M) x 1.375", Brass Hex Nipple
- B4BN-1H** 1/4 BSPT(M) x 1/4" NPT(M) x 1", Brass Hex Nipple Adapter
- B4BN-2** 1/4 BSPT(M) x 1/4" NPT(M) x 2", Brass Hex Nipple Adapter
- B4BN-2.5** 1/4 BSPT(M) x 1/4" NPT(M) x 2.5", Brass Hex Nipple Adapter
- B4BN-3** 1/4 BSPT(M) x 1/4" NPT(M) x 3", Brass Hex Nipple Adapter
- B4BN-3.5** 1/4 BSPT(M) x 1/4" NPT(M) x 3.5", Brass Hex Nipple Adapter
- B4BN-4.13** 1/4 BSPT(M) x 1/4" NPT(M) x 4.13", Brass Hex Nipple Adapter
- BUSHB4NM8NF** 1/8" NPT(F) x 1/4" NPT(M), Brass Bushing
- CKV-1** 1/4"NPT(F) → 1/4"NPT(M), 3 psi cracking pressure, Check Valve
- CKV-2** 1/8"NPT(M) → 1/8"NPT(F), 3 psi cracking pressure, Check Valve
- CKV-3HP** 1/4"NPT(F) → 1/4"NPT(M), 5 psi cracking pressure, HP Check Valve
- CKV-4** 1/4"NPT(F) → 1/4"NPT(M), 15 psi cracking pressure, Check Valve
- COUPLB4C** 1/4" NPT(F) x 1/4" NPT(F), Brass Coupler
- OPMAINTADPT** Maintenance Adapter
- RV-1** 1/8" NPT(M) x 1 PSI Cracking Pressure, Relief vent



Push-in Tube Fittings

6mm OD Tube Fittings:

3101-06-19	M5(M), Straight
3106-06-00	6mmOD x 6mmOD Tube to Tube Straight
3109-06-10	1/8BSPT(M) x 90°
3109-06-11	1/8"NPT(M) x 90°
3109-06-14	1/4"NPT(M) x 90°
3109-06-6MPC	M6(M) x 90°
3114-06-10	1/8BSPT(F), Straight
3114-06-13	1/4BSPT(M), Straight
3169-06-13	G1/4BSPP(M) x 90°
3175-06-10	1/8BSPT(M), Straight
3175-06-11	1/8"NPT(M), Straight
3175-06-6MMP	M6(M), Straight
3199-06-19	M5(M) x 90°

1/4" OD Tube Fittings:

3009-56-11	1/8"NPT(F) x 90°
3014-56-11	1/8"NPT(F), Straight
3014-56-14	1/4"NPT(F), Straight
3109-56-10	1/8BSPT(M) x 90°
3109-56-11	1/8"NPT(M) x 90°
3109-56-14	1/4"NPT(M) x 90°
3171-56-20	10-32UNF(M), Straight
3175-56-11	1/8"NPT(M), Straight
3175-56-14	1/4"NPT(M), Straight



5/16" (8mm) OD Tube Fittings:

3009-08-11	1/8"NPT(F) x 90°
3009-08-14	1/4"NPT(F) x 90°
3014-08-11	1/8"NPT(F), Straight
3014-08-14	1/4"NPT(F), Straight
3106-08-00	8mmOD x 8mmOD Tube to Tube, Straight
3109-08-10	1/8BSPT(M) x 90°
3109-08-11	1/8"NPT(M) x 90°
3109-08-13	1/4BSPT(M) x 90°
3109-08-14	1/4"NPT(M) x 90°
3168-08-06	8mmOD(F) x 6mmOD(M) Expander
3169-08-13	G1/4BSPP(M) x 90°
3169-08-17	G3/8BSPP(M) x 90°
3175-08-10	1/8BSPT(M), Straight
3175-08-11	1/8"NPT(M), Straight
3175-08-13	1/4BSPT(M), Straight
3175-08-14	1/4"NPT(M), Straight
3805-08-10	1/8BSPT(M), Straight Stainless Steel
3805-08-11	1/8"NPT(M), Straight Stainless Steel
3805-08-14	1/4"NPT(M), Straight Stainless Steel
3889-08-10	1/8BSPT(M) x 90° Stainless Steel
3889-08-11	1/8"NPT(M) x 90° Stainless Steel
3889-08-14	1/4"NPT(M) x 90° Stainless Steel

3/8" OD Tube Fittings:

3109-60-11	1/8"NPT(M) x 90°
3109-60-14	1/4"NPT(M) x 90°
3175-60-11	1/8"NPT(M), Straight
3175-60-14	1/4"NPT(M), Straight

Tubing and Accessories

Nylon tubing is sold two ways; pre-filled in 5 foot increments from 5 to 30 feet, or empty in any length from 1 to 100 feet.

TB6MM	6mm OD Nylon Tubing
TBP5600	1/4" OD Nylon Tubing
TBP5800A	5/16" (8mm) OD Nylon Tubing
TBP6000	3/8" OD Nylon Tubing

TB3000-71-00	Nylon Tubing Cutter
TBCLIP-08	5/16" (8mm) OD Installation Clip

TB5800CP	5/16" OD Copper Tubing
-----------------	------------------------



TBCLIP-08



TB3000-71-00



Sample: TB-58A-30-Mobilith AW-2

Plug 'n Lube™ pre-filled tubing

Just specify tubing O.D., length and lubricant desired.

Tubing O.D.

6MM	= 6mm OD
056	= 1/4" OD
58A	= 5/16" OD
060	= 3/8" OD

Tubing Length

TB - XXX - XX - (Lubricant name)

Chain Oil Brush Assemblies

Chain Oil Brush Assembly includes a brush, 18" length of 5/16" OD nylon tubing and 2 push-in tube fittings. We recommend using a check valve (part # CKV-2) with all Chain Oil Brush Assemblies. Mounting brackets are also available for easy installation.

CA-1	Chain Oil Assembly with 2" Flat Nylon Brush
CA-1S	Chain Oil Assembly with 2" Flat Stainless Brush
CA-2	Chain Oil Assembly with 5/8" Round Nylon Brush
CA-2S	Chain Oil Assembly with 5/8" Round Stainless Brush
CA-3	Chain Oil Assembly with 1" Round Nylon Brush
CA-3S	Chain Oil Assembly with 1" Round Stainless Brush
OPLBKT-2	Oil brush mounting bracket

Brushes

OPBRUSH5/8RD	5/8" Round Nylon Brush
OPBRUSH1RD	1" Round Nylon Brush
OPBRUSH2FLAT	2" Flat Nylon Brush
OPBRUSH5/8RDSS	5/8" Round Stainless Steel Brush
OPBRUSH1RDSS	1" Round Stainless Steel Brush
OPBRUSH2FLATSS	2" Flat Stainless Steel Brush



CA-1 with bracket



2" Flat Nylon
1" Round Nylon
5/8" Round Nylon
1" Round Stainless Steel

